
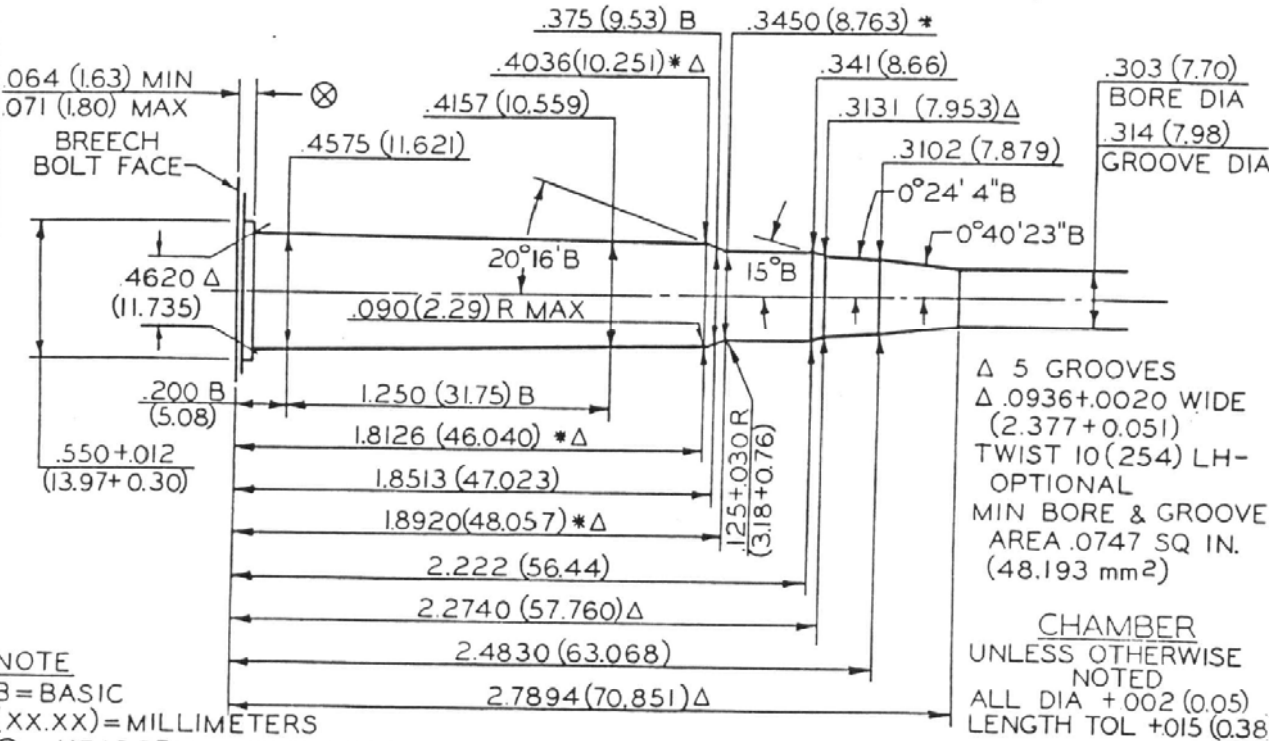


[Click HERE to return to the Table of Contents](#)

**MAXIMUM CARTRIDGE / MINIMUM CHAMBER**

**303 BRITISH**

**CARTRIDGE**  
UNLESS OTHERWISE NOTED  
BODY DIA -.008 (0.20)

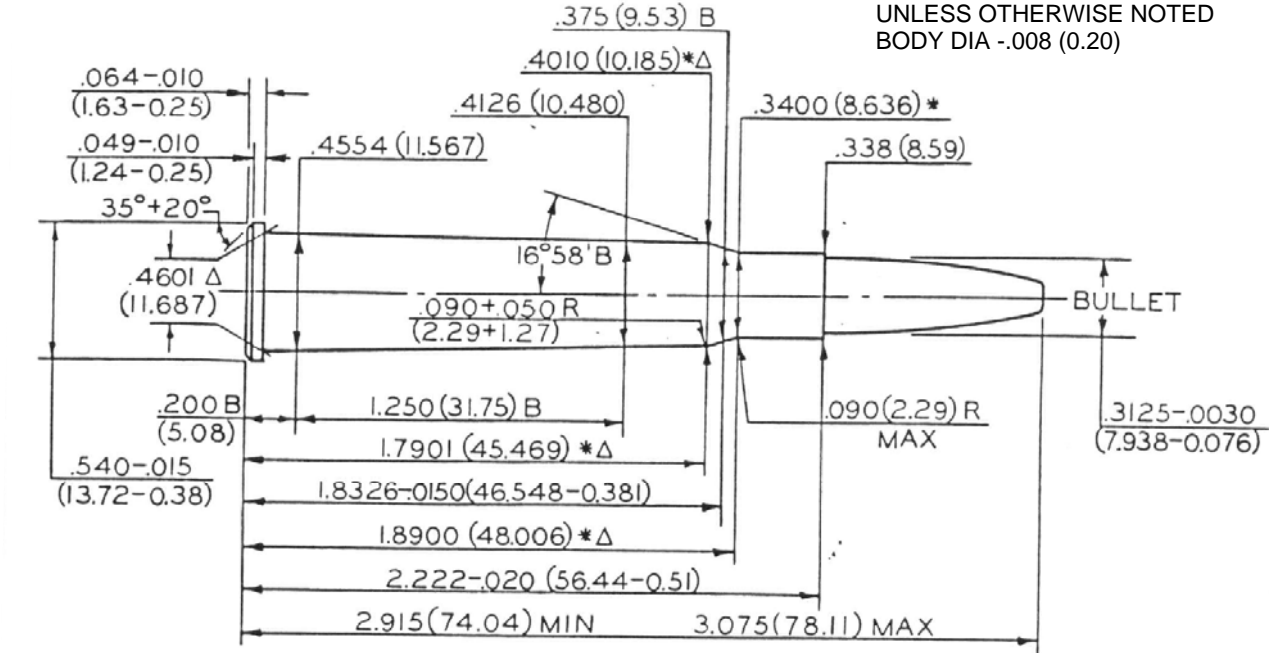

**NOTE**  
B=BASIC  
(XX.XX)=MILLIMETERS  
⊗=HEADSPACE DIMENSION

\* DIMENSIONS ARE TO INTERSECTION OF LINES Δ=REFERENCE DIMENSION  
ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)

Δ 5 GROOVES  
Δ .0936+.0020 WIDE  
(2.377+0.051)  
TWIST 10(254) LH-  
OPTIONAL  
MIN BORE & GROOVE  
AREA .0747 SQ IN.  
(48.193 mm<sup>2</sup>)  
**CHAMBER**  
UNLESS OTHERWISE  
NOTED  
ALL DIA +.002 (0.05)  
LENGTH TOL +.015 (0.38)